




MULTI-GNSS RTK, HIGH-ACCURACY RECEIVER

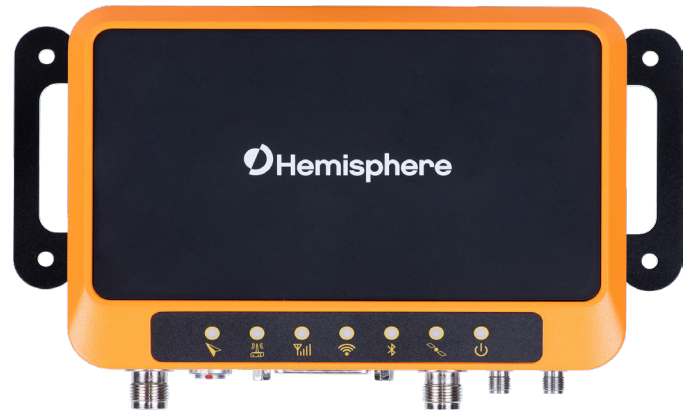

The new R632 GNSS receiver is a full-solution product in an incredibly compact and powerful package, offering the ability to easily upgrade to an astounding 0.01° accurate heading.

Built on the foundation of Hemisphere's new Lyra, Cygnus and Aquila core technologies, the R632 offers amazing new interference rejection and multipath mitigation. The result is an exceptional combination of performance, communications, and connectivity.

The R632's standard configuration offers multiple methods of connectivity and an impressive array of wireless communications.

Through Hemisphere's Atlas correction network, the R632 offers worldwide stand-alone positioning to 4 cm.

The R632 is an incredible solution for almost any application requiring professional-level position and heading performance.

Key Features

- Multi-frequency GPS, GLONASS, BeiDou (including Phase 3), Galileo, IRNSS, QZSS, and Atlas L-band
- Long-range RTK baselines up to 50 km with fast acquisition times
- Worldwide Atlas L-band corrections to 4 cm
- UHF (400MHz & 900MHz), cellular (GSM, 3G & 4G, Bluetooth, and Wi-Fi) wireless communication
- Athena GNSS engine providing best-in-class RTK performance
- Status LEDs and powerful WebUI, making the R632 easy to monitor and configure
- Ethernet, CAN, Serial, and USB, providing exceptional connectivity
- Free firmware updates for the life of the product

GNSS Receiver Specifications

Receiver Type:	Multi-Frequency GPS, GLONASS, BeiDou, Galileo, QZSS, IRNSS, and Atlas L-band
Signals Received:	GPS L1CA/L1P/L1C/L2P/L2C/L5 GLONASS G1/G2/G3, P1/P2 BeiDou B1i/B2i/B3i/B10C/B2A/B2B/ ACEBOC GALILEO E1BC/E5a/E5b/E6BC/ALTB QZSS L1CA/L2C/L5/L1C/LEX IRNSS L5 Atlas L-band
GPS Sensitivity:	-142 dBm
SBAS Tracking:	3-channel, parallel tracking
Update Rate:	10 Hz standard, 20 Hz optional (with activation)
Timing (1PPS)	
Accuracy:	20 ns
Cold Start:	60 s typical (no almanac or RTC)
Warm Start:	30 s typical (almanac and RTC)
Hot Start:	10 s typical (almanac, RTC and position)
Antenna Input Impedance:	50 Ω
Maximum Speed:	1,342 mph (1,166 kts)
Maximum Altitude:	18,000 m (59,055 ft)

Accuracy

Heading (RMS):	0.2° @ 0.5 m antenna separation 0.1° @ 1.0 m antenna separation 0.05° @ 2.0 m antenna separation
-----------------------	--

Positioning (RMS):	Horizontal	Vertical
Single Point:	1.2 m	2.4 m
SBAS: ¹	0.3 m	0.6 m
Atlas H10: ¹	0.04 m	0.08 m
Atlas H30: ^{1,3}	0.15 m	0.3 m
Atlas Basic: ^{1,3}	0.5 m	1.0 m
RTK: ^{1,2}	8 mm + 1 ppm	15 mm + 1 ppm

L-Band Receiver Specifications

Receiver Type:	Single Channel
Frequency Range:	1525 to 1560 MHz
Sensitivity:	-130 dBm
Channel Spacing:	5.0 kHz
Satellite Selection:	Manual and Automatic
Reacquisition Time:	15 seconds (typical)

Communications

Bluetooth:	Bluetooth 2.1+EDR / 4.0 LE
Wi-Fi:	802.11 b/g
Network:	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/ B18/B19/B20/B25/B26/B28 LTE TDD: B38/B39/B40/B41 UMTS: B1/B2/B4/B5/B6/B8/B19 GSM: B2/B3/B5/B8
Radio:	Frequency range: 410MHz ~ 470MHz and 902.4MHz ~ 928MHz Channel Spacing: 12.5 KHz / 25 KHz Protocol: TrimTalk 450S, PCC EOT, TrimMark III(19200)
RTK Formats:	RTCM2.1, RTCM2.3, RTCM3.0, RTCM3.1, RTCM3.2 including MSM

Correction I/O

Protocol:	Hemisphere GNSS proprietary ROX format, RTCM v2.3, RTCM v3.2, CMR, CMR+
Data I/O Protocol:	NMEA 0183, NMEA2000, Hemisphere GNSS binary
Timing Output:	1PPS (CMOS, rising edge sync)
Event Marker Output:	Open drain, falling edge sync, 10 kΩ, 10 pF load

Physical

Weight:	550 g
Dimensions:	105 x 150 x 34 mm
Power Connector:	2-pin metal ODU
Antenna Connector:	TNC female, straight (2x)
Data Connector:	D-SUB 26 (2x RS485, 1x RS232, 1x USB2, 1x 1PPS, 1x Event, 1x CAN, 1x 100m Ethernet)
LTE Connector:	SMA
UHF Connector:	SMA
Other:	Micro SIM card slot and Micro SD card slot
Storage Type:	8 GB internal, Micro SD card up to 32 GB

Environmental

Operating Temperature:	-30°C ~ +65°C
Storage Temperature:	-40°C ~ +80°C
Protection:	IP6x, IPx6, IPx7
Shock Resistance:	EP455 Section 5.41.1 Operational
Humidity:	95% non-condensing
Vibration:	EP455 Section 5.15.1 Random
EMC:	CE (IEC 60945 Emissions and Immunity) FCC Part 15, Subpart B, CISPR22 UL recognized, 94HB Flame Class Rating (3) 1.49 mm
Inflammability:	
Chemical Resistance:	Cleaning agents, soapy water, industrial alcohol, water vapor, solar radiation (UV)

Electrical

Input Voltage:	8 to 36 V DC
Power Consumption:	7.65 W nominal (all signals + L-band)
Reverse Polarity Protection:	Yes
Antenna Voltage Output:	5 V DC maximum
Antenna Short Circuit Protection:	Yes
Input Range:	10 to 40 dB

User Interface

LEDs:	Power, Satellite, Bluetooth, Cellular, Wi-Fi, UHF, Heading ³
WebUI:	Supports software updates, receiver status and settings and data downloads via smartphones, tablets or other Wi-Fi capable devices.

1. Depends on multipath environment, number of satellites in view, satellite geometry, and ionospheric activity
2. Depends also on baseline length
3. Requires an activation or subscription from Hemisphere GNSS



Hemisphere GNSS

1700 N. Desert Drive, Suite 101
Tempe, AZ 85288, USA

Phone: +1 (480) 348-6380
Toll-Free: +1 (855) 203-1770
Fax: +1 (480) 270-5070

precision@hgns.com
hgns.com