


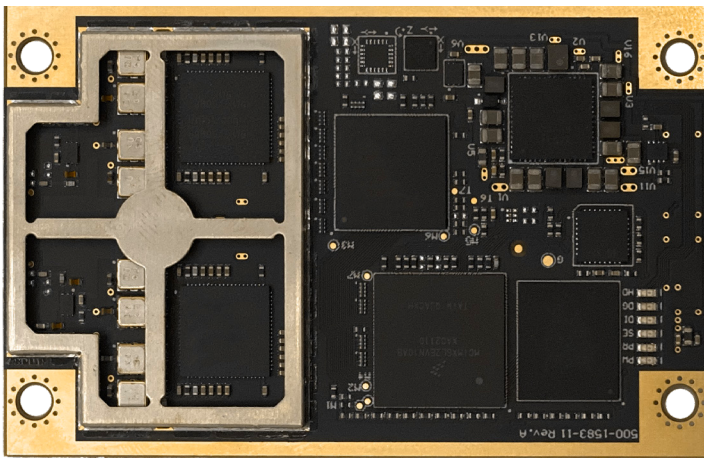

The Vega 60 is our most advanced GNSS heading and positioning board.

Vega 60 uses dual antenna ports to create a series of additional capabilities; including fast, high-accuracy heading over short baselines, RTK positioning, on-board Atlas L-band, RTK-enabled heave, low power consumption, and precise timing.

Scalable Solutions

With Vega 60, heading and positioning are scalable and field upgradeable with all Hemisphere software and service options. Utilize the same multi-constellation GNSS solutions in either single-frequency mode or employ the full performance and fast RTK initialization times over long distances with multi-frequency signals. High accuracy L-band positioning from meter to sub-decimeter levels is available via the Atlas correction service.

Ease of Migration

Leverage the 60-pin industry standard form factor for easy upgradeability from other manufacturers' modules.

Key Features

- Extremely accurate heading with long baselines
- Available multi-frequency position, dual-frequency heading supporting GPS, GLONASS, BeiDou, Galileo, QZSS, NavIC (IRNSS), and L-band
- Atlas® L band capable to 4 cm RMS
- Athena™ GNSS engine providing best-in-class RTK performance
- Excellent coasting performance
- 5 cm RMS RTK-enabled heave accuracy
- Strong multipath rejection and Cygnus™ interference mitigation
- New multi-axis gyro and tilt sensor for reliable coverage during short GNSS outages

GNSS Receiver Specifications

Receiver Type:	Multi-Frequency GPS, GLONASS, BeiDou, Galileo, QZSS, NavIC (IRNSS) and Atlas L-band	
Signals Received:	GPS L1CA/L1P/L1C/L2P/L2C/L5 GLONASS G1/G2/G3, P1/P2 BeiDou B1i/B2i/B3i/B1C/B2a/B2b/ AceBOC GALILEO E1BC/E5a/E5b/E6BC/ AltBOC QZSS L1CA/L2C/L5/L1C/L6 NavIC (IRNSS) L5 Atlas	
Channels:	1,100+	
GPS Sensitivity:	-142 dBm	
SBAS Tracking:	3-channel, parallel tracking	
Update Rate:	10 Hz standard, 1 Hz or 20 Hz optional (with activation)	
Timing (PPS)	20 ns	
Accuracy:	100°/s maximum	
Rate of Turn:	60 s typical (no almanac or RTC)	
Cold Start:	30 s typical (almanac and RTC)	
Warm Start:	10 s typical (almanac, RTC and position)	
Hot Start:	10 s typical (Hot Start)	
Heading Fix:	10 s typical (Hot Start)	
Antenna Input Impedance:	50 Ω	
Maximum Speed:	1,342 mph (1,166 kts)	
Maximum Altitude:	18,000 m (59,055 ft)	

Accuracy

Positioning:	RMS (67%)	2DRMS (95%)
Autonomous, no SA: ¹	1.2 m	2.5 m
SBAS: ²	0.3 m	0.6 m
Atlas H10: ^{1,3}	0.04 m	0.08 m
Atlas H30: ^{1,3}	0.15 m	0.3 m
Atlas Basic: ^{1,3}	0.50 m	1.0 m
RTK: ¹	8 mm + 1 ppm	15 mm + 2 ppm
Heading (RMS):	0.16° RMS @ 0.5 m antenna separation	
	0.08° RMS @ 1.0 m antenna separation	
	0.04° RMS @ 2.0 m antenna separation	
	0.02° RMS @ 5.0 m antenna separation	
Pitch/Roll (RMS):	0.5°	
Heave (RMS): ¹	30 cm RMS (DGNSS), 5 cm RMS (RTK)	

L-Band Receiver Specifications

Receiver Type:	Dual Channel ⁴
Channels:	1525 to 1560 MHz
Satellite Selection:	Manual and Automatic
Reacquisition Time:	15 seconds (typical)

Power

Input Voltage:	3.3 VDC +/- 5%
Power Consumption:	< 2.5 W all signals + L-band
Current Consumption:	757 mA all signals + L-band
Antenna Voltage:	5 VDC maximum
Antenna Short Circuit Protection:	Yes
Antenna Gain Input Range:	10 to 40 dB

Communications

Ports:	5 x full-duplex 3.3V CMOS ⁶ 2 x USB (1 Host/1 Device) 1 x Ethernet 10/100Mbps 2 x CAN (NMEA2000, ISO 11783) 4 x PPS output ⁷ , 4 x Event input ⁷ 3.3V CMOS
Interface Level:	4800 - 460800
Baud Rates:	Hemisphere GNSS proprietary ROX format, RTCM v2.3, RTCM v3.2, CMR ⁵ , CMR+ ⁵
Correction I/O Protocol:	NMEA 0183, Hemisphere binary
Data I/O Protocol:	CMOS, programmable
Timing & Event I/O:	edge sync, 10 k Ω , 10 pF load

Environmental

Operating Temperature:	-40°C to +85°C (-40°F to +185°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing (when in an enclosure)
Mechanical Shock:	EP455 Section 5.14.1 Operational (when mounted in an enclosure with screw mounting holes utilized)
Vibration:	EP455 Section 5.15.1 Random
EMC:	CE (IEC 60945 Emissions and Immunity), FCC Part 15, Subpart B, CISPR 22

Mechanical

Dimensions:	71 L x 46 W x 10 H (mm) 2.8 L x 1.8 W x 0.4 H (in)
Weight:	24 g (0.85 oz)
Status Indicators (LED):	Power, Primary and Secondary GNSS lock, Differential lock, DGNSS position, Heading
Connectors:	2 x 30 female socket, 0.8 mm pitch RF: MMBX, female, straight

Aiding Devices

Gyro:	Provides smooth and fast heading reacquisition. During loss of GNSS signals heading stability is degraded by < 1° per minute for up to 3 minutes.
Tilt Sensors:	Provide pitch, roll data and assist in fast start-up and reacquisition of heading solution

1. Depends on multipath environment, number of satellites in view, satellite geometry, and ionospheric activity
2. Depends on multipath environment, number of satellites in view, SBAS coverage, satellite geometry, and ionospheric activity
3. Hemisphere GNSS proprietary
4. With future firmware update
5. CMR and CMR+ do not cover proprietary messages outside of the typical standard
6. Two ports include flow control, requires future firmware update
7. Multi pin use requires future firmware update



Hemisphere GNSS

1700 N. Desert Drive, Suite 101
Tempe, AZ 85288, USA

Phone: +1 (480) 348-6380
Toll-Free: +1 (855) 203-1770
Fax: +1 (480) 270-5070

precision@hgnss.com
hgnss.com